



**ITEM: TM-C01**

MATERIAL: RUBBER&PLASTIC  
 HEIGHT: 500MM  
 BOTTOM: 280\*280MM  
 WEIGHT: 1.5KGS  
 REFLECTION: 110MM  
 PACKING: BAG 15PCS/BAG  
 CONTAINER: 11000PCS/20FT



**ITEM: TM-C02**

MATERIAL: RUBBER&PLASTIC  
 HEIGHT: 750MM  
 BOTTOM: 380\*380MM  
 WEIGHT: 2.5KGS  
 REFLECTION: 220MM  
 PACKING: BAG 12PCS/BAG  
 CONTAINER: 5800PCS/20FT



**ITEM: TM-C03**

MATERIAL: RUBBER&PLASTIC  
 HEIGHT: 1000MM  
 BOTTOM: 490\*490MM  
 WEIGHT: 5KGS  
 (AVAILABLE 4.5KGS-7KGS)  
 REFLECTION: 220MM  
 PACKING: BAG 5PCS/BAG  
 CONTAINER: 2650PCS/20FT



**ITEM: TM-C04**

MATERIAL: RUBBER&PLASTIC  
 HEIGHT: 750MM  
 BOTTOM: 380\*380MM  
 WEIGHT: 2.5KGS  
 REFLECTION: 140MM  
 PACKING: BAG 10PCS/BAG  
 CONTAINER: 5500PCS/20FT



**ITEM: TM-C05**

MATERIAL: RUBBER&PLASTIC  
 HEIGHT: 750MM  
 BOTTOM: 400\*400MM  
 WEIGHT: 3.8KGS  
 REFLECTION: YELLOW&BLACK  
 PACKING: BAG 5PCS/BAG  
 CONTAINER: 3000PCS/20FT



**ITEM: TM-C06**

MATERIAL: RUBBER&PLASTIC  
 HEIGHT: 750MM  
 BOTTOM: 400\*400MM  
 WEIGHT: 3.8KGS  
 REFLECTION: RED&WHITE  
 PACKING: BAG 5PCS/BAG  
 CONTAINER: 3000PCS/20FT



**ITEM: TM-C07**

MATERIAL: PLASTIC  
 HEIGHT: 500MM  
 BOTTOM: 260\*260MM  
 WEIGHT: 0.6KGS  
 REFLECTION: 100MM  
 PACKING: BAG 15PCS/BAG  
 CONTAINER: 10500PCS/20FT



**ITEM: TM-C08**

MATERIAL: RUBBER  
 HEIGHT: 500MM  
 BOTTOM: 350\*350MM  
 WEIGHT: 1.5KGS  
 REFLECTION: 140MM  
 PACKING: BAG 15PCS/BAG  
 CONTAINER: 8000PCS/20FT



**ITEM: TM-C09**

MATERIAL: PLASTIC  
 HEIGHT: 500MM  
 BOTTOM: 350\*350MM  
 WEIGHT: 6KGS  
 REFLECTION: FULL  
 PACKING: BAG 15PCS/BAG  
 CONTAINER: 8000PCS/20FT



**ITEM: TM-C10**

MATERIAL: RUBBER  
 HEIGHT: 700MM  
 BOTTOM: 390\*390MM  
 WEIGHT: 2.7KGS  
 REFLECTION: UP 140MM, DOWN 50MM  
 PACKING: BAG 10PCS/BAG  
 CONTAINER: 5000PCS/20FT



**ITEM: TM-C11**

MATERIAL: RUBBER  
 HEIGHT: 700MM  
 BOTTOM: 390\*390MM  
 WEIGHT: 2.8KGS  
 REFLECTION: FULL  
 PACKING: BAG 10PCS/BAG  
 CONTAINER: 5000PCS/20FT



**ITEM: TM-C12**

MATERIAL: RUBBER  
 HEIGHT: 750MM  
 BOTTOM: 380\*380MM  
 WEIGHT: 5.0KGS  
 REFLECTION: 320MM  
 PACKING: BAG 5PCS/BAG  
 CONTAINER: 3600PCS/20FT



**ITEM: TM-C13**

MATERIAL:RUBBER  
HEIGHT: 750MM  
BOTTOM: 380\*380MM  
WEIGHT: 5.0KGS  
REFLECTION: FULL ORANGE  
PACKING:BAG 5PCS/BAG  
CONTAINER:3600PCS/20FT



**ITEM: TM-C14**

MATERIAL:RUBBER  
HEIGHT: 750MM  
BOTTOM: 380\*380MM  
WEIGHT: 5.0KGS  
PACKING:BAG 5PCS/BAG  
CONTAINER:3600PCS/20FT



**ITEM: TM-C15**

MATERIAL:RUBBER  
HEIGHT: 750MM  
BOTTOM: 380\*380MM  
WEIGHT: 5.0KGS  
REFLECTION: 320MM  
PACKING:BAG 5PCS/BAG  
CONTAINER:3600PCS/20FT



**ITEM: TM-C16**

MATERIAL:RUBBER  
HEIGHT: 750MM  
BOTTOM: 380\*380MM  
WEIGHT: 5.0KGS  
PACKING:BAG 5PCS/BAG  
CONTAINER:3600PCS/20FT



# WARNING TRIANGLE

RoHS COMPLIANCE CE UL ISO9001:2000



TM-W01



TM-W02



TM-W03



TM-W04



TM-W05




TM-W06



TM-W07



TM-W08

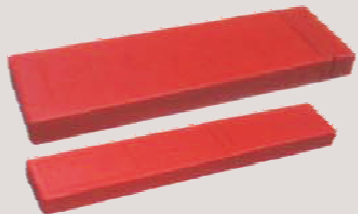



# FIRE EXTINGUISHER



## BC POWDER PORTABLE PRESSURE-STORE EXTINGUISHER (MFZ) BC干粉手提贮压式系列灭火器 (MFZ)

Applicable to extinguish the following initial fires  
适用于扑灭以下初起火灾:

- Flammable liquid fires  
可燃液体火
- Gas and vapour fires  
气体和蒸汽火
- Fire involving energized electrical conductors  
火涉及到带电的电器设备



## Halon 1211 Portable Extinguisher (MY) 1211手提式灭火器(MY)

Applicable to extinguish the following initial fires  
适用于扑灭以下初起火灾:

- Ordinary solid material fires  
普通固体材料火
- Flammable liquid fires  
可燃液体火
- Gas and vapour fires  
气体和蒸汽火
- Fire involving energized electrical conductors  
火涉及到带电的电器设备



### Technical Data Of Our Regular Products 技术指标:

Item 项目	Wt of extinguishing medium 药剂 充装量 (Kg)	Propellant 驱动气体	Pressure of 20°C 20°C 工作压力 (Mpa)	Effective bu k range 有效喷射 距离 (M)	Effective discharge time 有效喷射 时间 (S)	Rate of residual medium 喷射 剩余率 (%)	Minimum burst pressure 最小 爆破压力 (Mpa)	Dimensions 外形尺寸 ΦxH (MM)	Total weight 总重量 (Kg)
Model 型号									
MFZ2	2±3%	N2	1.2	≥3.5	≥8	≤15	≥5.5	110x312	3.1
MFZ3	3.1±3%	N2	1.2	≥3.5	≥8	≤15	≥5.5	133x418	4.7
MFZ4	4±2%	N2	1.2	≥4.5	≥10	≤15	≥5.5	133x477	6.25
MFZ5	5±2%	N2	1.2	≥5.5	≥14	≤15	≥5.5	153x628	12

### Technical Data Of Our Regular Products 技术指标:

Item 项目	Wt of extinguishing medium 药剂 充装量 (Kg)	Propellant 驱动气体	Pressure of 20°C 20°C 工作压力 (Mpa)	Effective bulk range 有效喷射 距离 (M)	Effective discharge time 有效喷射 时间 (S)	Rate of residual medium 喷射 剩余率 (%)	Minimum burst pressure 最小 爆破压力 (Mpa)	Dimensions 外形尺寸 ΦxH (MM)	Total weight 总重量 (Kg)
Model 型号									
MY2	2 ±0 -5%	N2	1.0	≥3.5	≥8	≤10	≥5.5	110x357	3
MY4	4 ±5%	N2	1.2	≥5.5	≥10	≤10	≥5.5	130x418	6.1

## Cylinder of Extinguisher 灭火器筒体

### Technical Data Of Our Regular Products 技术指标:

Item 项目	Minimum Thickness 最小壁厚 (MM)	Minimum Burst Pressure 最小爆破压力 (Mpa)	Dimension 外型尺寸 ΦxH (MM)
Model 型号			
MFZL1	1.0	≥5.5	90x230
MFZL2	1.1	≥5.5	110x314
MFZL3	1.2	≥5.5	133x377
MFZL4	1.2	≥5.5	133x401
MFZL5	1.2	≥5.5	140x456
MFZL8	1.3	≥5.5	163x568



## ABC POWDER PORTABLE PRESSURE-STORE EXTINGUISHER (MFZL) ABC干粉手提贮压式系列灭火器 (MFZL)

Applicable to extinguish the following initial fires  
适用于扑灭以下初起火灾:

- Ordinary solid material fires  
普通固体材料火
- Flammable liquid fires  
可燃液体火
- Gas and vapour fires  
气体和蒸汽火
- Fire involving energized electrical conductors  
火涉及到带电的电器设备



The Cylinders are tested to comply with ISO7165-1999 for extinguisher cylinder.

可按顾客要求制作特殊规格型号。

## Wheeled Pressure-store Powder Extinguishers 推车贮压式干粉灭火器

35Kg ABC & 35Kg BC manufactured under the National standard.  
35Kg ABC & 35Kg BC 符合国家技术标准。



### Technical Data Of Our Regular Products 技术指标:

Item 项目	Wt of extinguishing medium 药剂 充装量 (Kg)	Propellant 驱动气体	Pressure of 20°C 20°C 工作压力 (Mpa)	Effective bulk range 有效喷射 距离 (M)	Effective discharge time 有效喷射 时间 (S)	Rate of residual medium 喷射 剩余率 (%)	Minimum burst pressure 最小 爆破压力 (Mpa)	Dimensions 外形尺寸 ΦxH (MM)	Total weight 总重量 (Kg)
Model 型号									
MFZL1	1±5%	N2	1.2	≥3	≥8	≤15	≥5.5	90x291	1.7
MFZL2	2±3%	N2	1.2	≥3.5	≥8	≤15	≥5.5	110x313	3.2
MFZL3	3±3%	N2	1.2	≥3.5	≥13	≤15	≥5.5	133x418	5
MFZL4	4±2%	N2	1.2	≥4.5	≥13	≤15	≥5.5	133x477	6.25
MFZL5	5±2%	N2	1.2	≥4.5	≥13	≤15	≥5.5	140x528	7.3
MFZL8	8±2%	N2	1.2	≥5.5	≥14	≤15	≥5.5	163x645	12.2